LEDLINE ACE 1220
USER INSTRUCTION

1. The most suitable operation temperature shall be −40° C to 65° C.

2. Please make sure that even during installa−tion, the predetermined bending direction will never change. The product is SIDE bending only, and it can't be twisted or top bending.

3. LEDLINE ACE 1220 shall not be bent sharply and it may cause product damage.


4. The minimum bending diameter is 240mm, over bending will damage and void any warranty.


5. During the installation, the LEDLINE ACE 1220 can not be:


−Twisted
−Dropped
−Bent at a 90° angle or bent at all
−Sagging/Hanging down


6. For installation, 2 ways for your selection.
−Mounting clips
−Alumium profile


7. Install the product into profile carefully and correctly, taking out and re−assembling will most likely cause the product damaged.

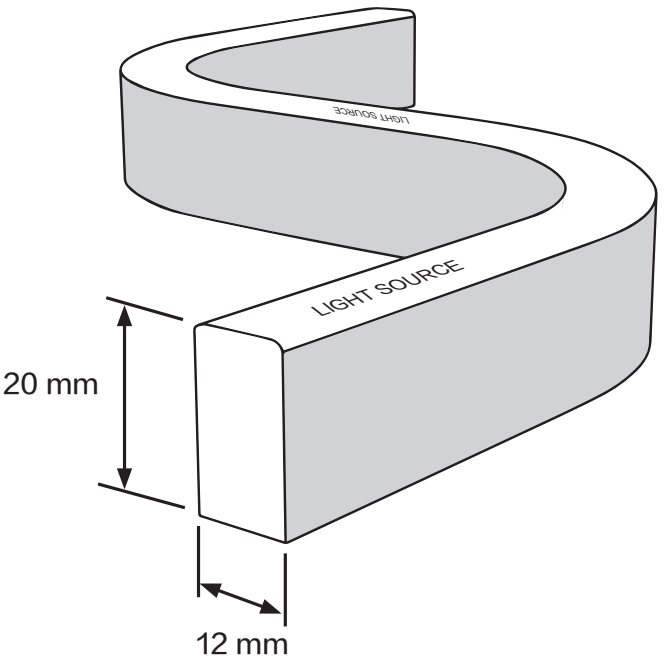

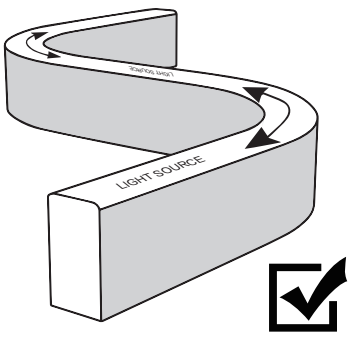


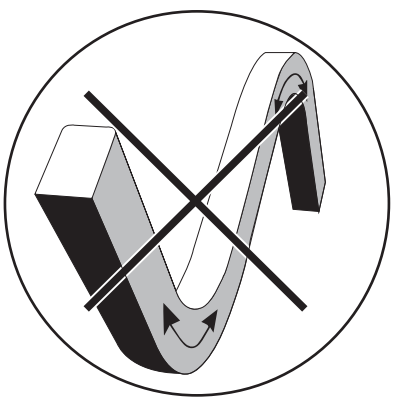

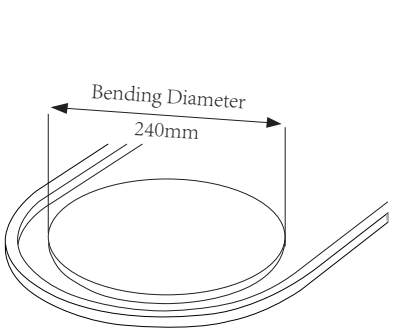

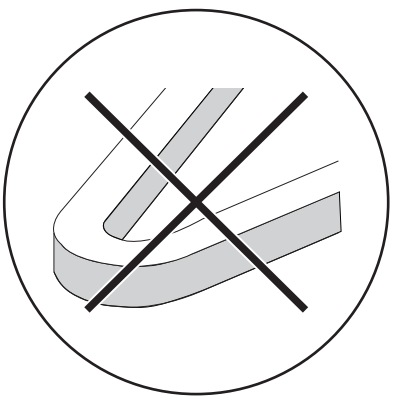


Bend too tight

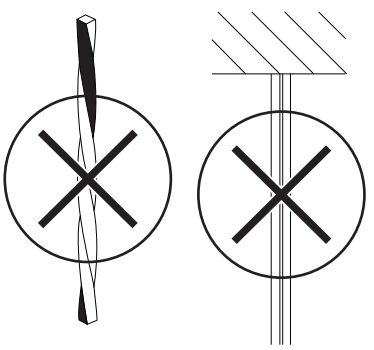


Do not twist


Do not hang

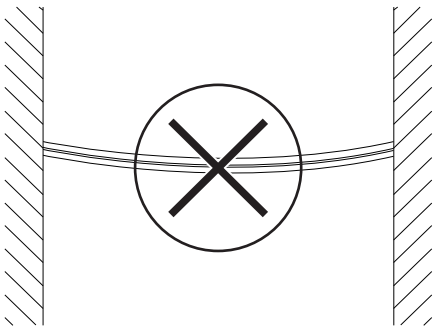



Do not droop


Warranty: All LED light are warranted to be free from defects in product itself from the date of purchase.
Within this period, we, at its sole option, repair or replace any components which fail from correct use. Such repairs or replacement will be made at no charge to the customer for parts only, provided that the customer shall be responsible for transportation cost of the goods.
This warranty does not cover failures due to abuse, misuse, improper handling, act of nature, negligence, normal wear, accidental damage, modifications or repairs made by the purchaser or incorrect voltage conditions.

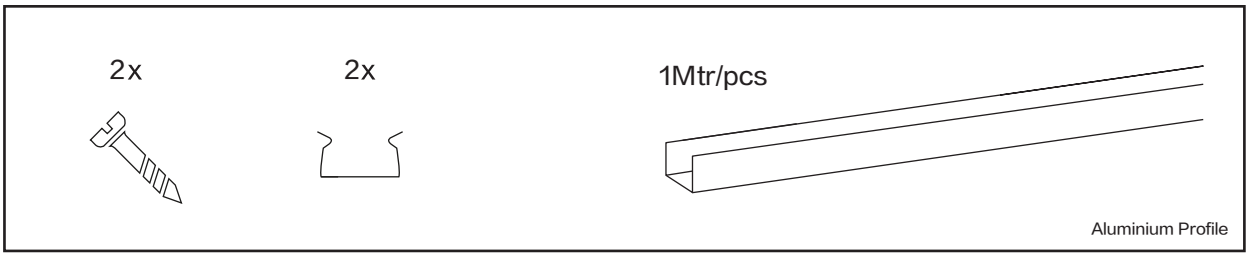

2x
2x
1Mtr/pcs
Aluminium Profile

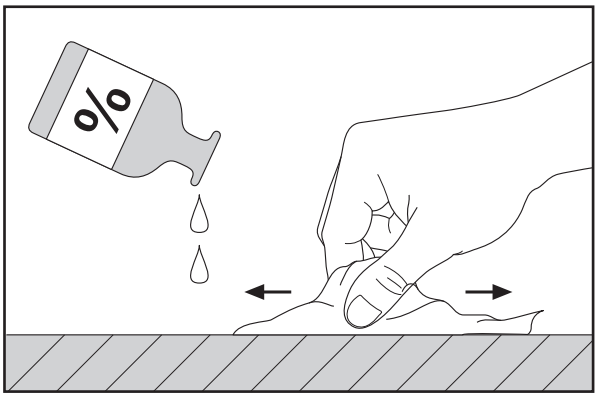

%

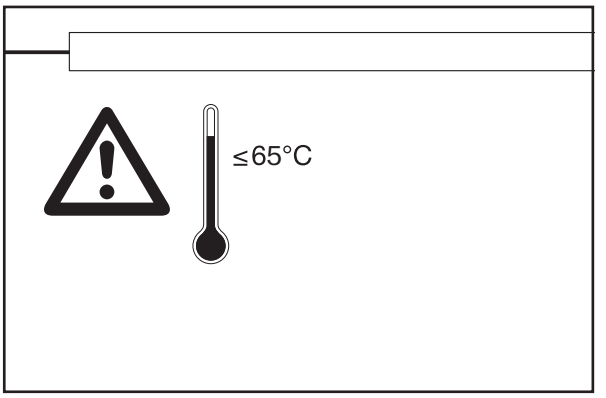
≤65°C

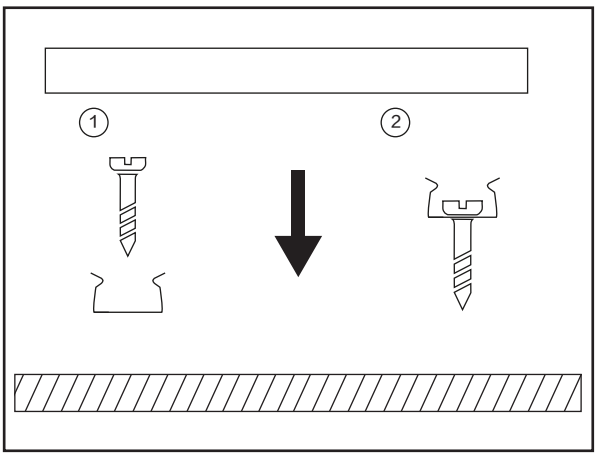
1
2

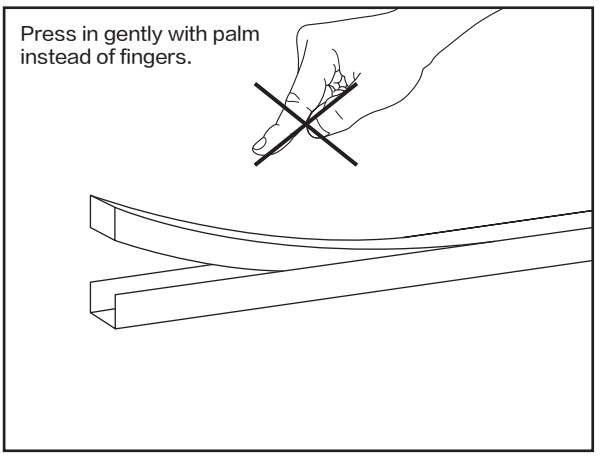
Press in gently with palm
instead of fingers.

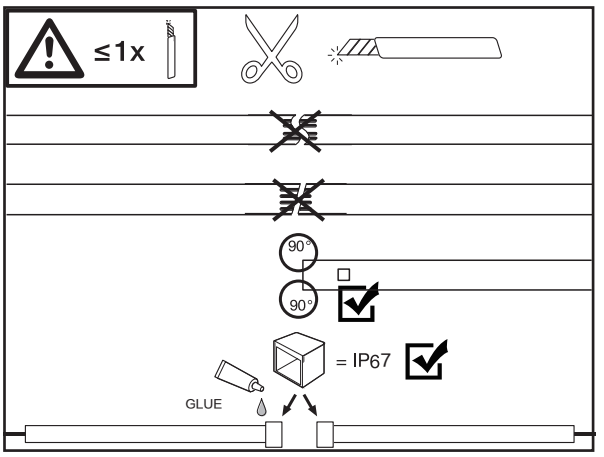
≤1x
90°
90°
= IP67
GLUE

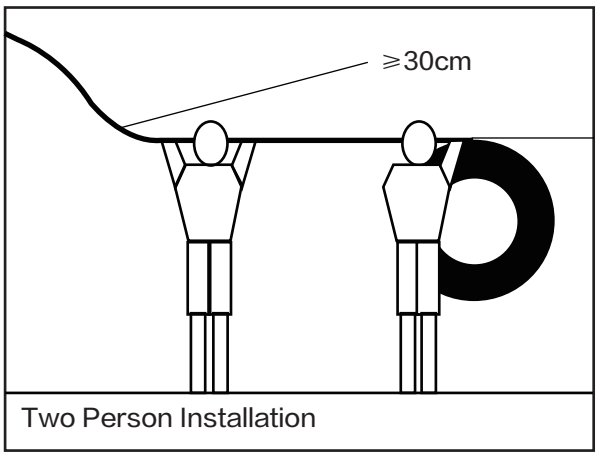
⩾30cm
Two Person Installation