LEDLINE AXE 1617 DMX RGBW

Deliver What You Design

3D Bending · Pixel RGBW

Features


• Smooth surface with cutting mark without seeing PCB and support reminding wrong bending
• IP68 protection(not for underwater application), UV resistance,and chemical resistance ensure the durability in various environments.
• Equipped with DMX control mode and dot-free lighting technology guarantees gorgeous color changing &fading lighting performance over its rated lifetime
• 3 years warranty

Date

Fixture type

Project name


Project phase

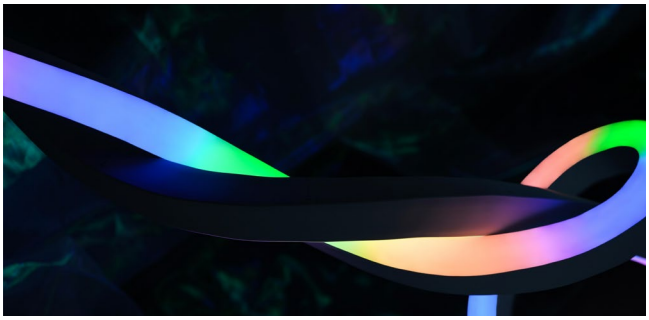

Applications

Living rooms, TV walls, feature walls, under-cabinet areas, staircases, ceiling coves, hallways, etc.

Bending Directions & Diameters

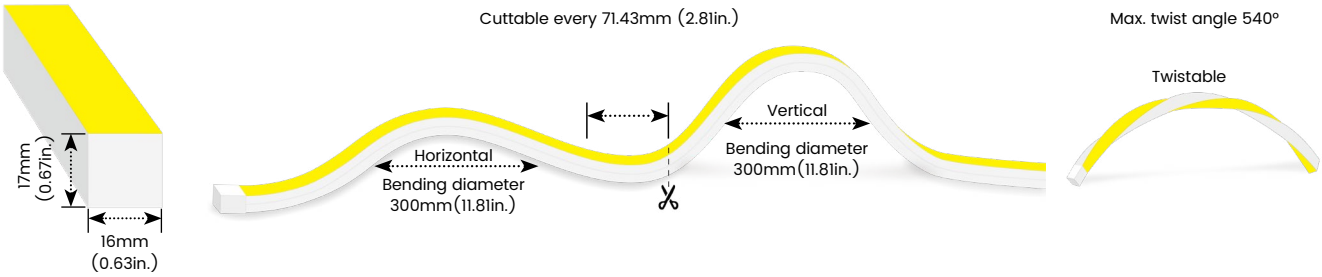

Order Code

Model	Bend Direction	Voltage	Control	CCT	Power	Left Feed Entry
AXE1617	**3D**-3D bending	**24V**-DC24V	**DMX**-DMX control	**RGBW827**-RGBW(RA80 2700K) **RGBW830**-RGBW(RA80 3000K)	**150**-15W/M	**F** Front **OW** Open wire 30cm(0.98ft) **B** Bottom **MC** Male connector with 30cm(0.98ft) cable **S** Side **FC** Female connector with 30cm(0.98ft)cable **C** Closed **NA** Only for Closed Feed Entry

Assembly Builder

Right Feed Entry				Length	
F	Front	**OW**	Open wire 30cm(0.98ft)	**Max. nominal**	8m(26.25ft)
B	Bottom	**MC**	Male connector with 30cm(0.98ft) cable	**Increment**	71.43mm (2.81in.)
S	Side	**FC**	Female connector with 30cm(0.98ft)cable		
C	Closed	**NA**	Only for Closed Feed Entry		

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page

LEDLINE AXE 1617 DMX RGBW

3D Bending · Pixel RGBW

Lumen Output (lm/m)


CCT	15W/M
R	29
G	105
B	24
W27K	77
W30K	83
RGBW27K	236
RGBW30K	240
Max. Run Length	8m

Techinical Details

Efficacy	16lm/W @RGBW30K 15W
CRI	Ra≥80
Beam Angle	110°
IK Rating	IK10 (with aluminium profile)
Average Life (L70B10)	>32,000 hours
IC Model	UCS 512CLN
Pixels/M	14
Storage Temperature	-40°C~ 65°C
Operating Temperature	-40°C~ 65°C

Photometry

AXE16173D-24-DMX-RGBW830-150
LEDLINE AXE 1617, 3D bending, 24V, DMX control, RGBW(RA80, 3000K), 15W/M



Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	64.16	26.2%
0-40	105.0	42.9%
0-60	185.9	76.76%
0-90	241.9	98.9%
0-180	244.6	100.0%


LEDLINE AXE 1617 DMX RGBW

3D Bending · Pixel RGBW


Feed Entry / End Cap Options


FT: Flush Translucent – IP68, factory-made only

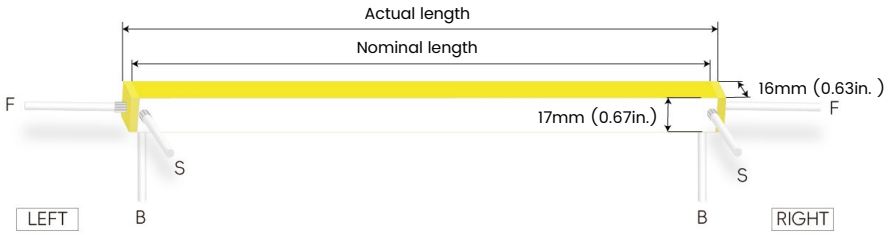



Silicone end cap – IP67, for field cuttable only

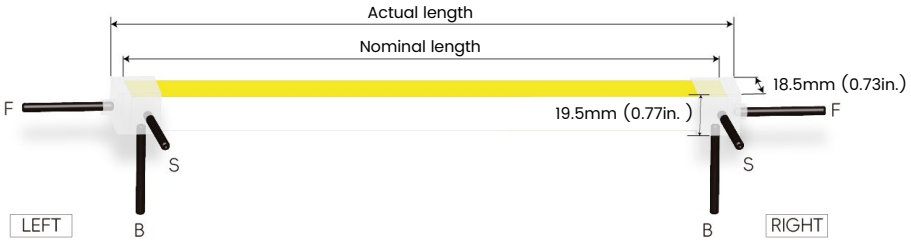





Connector Wire Options



OW: Open wire, **Dry only**
Standard 30cm(0.98ft),20 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 30cm(0.98ft), 20 AWG





FC: Female connector, **Wet**
Standard 30cm(0.98ft), 20 AWG

LEDLINE AXE 1617 DMX RGBW

3D Bending · Pixel RGBW



Mounting Options



AC167-AP


Name	Straight surface profile
Material	Aluminum
Standard Length	1M (3.28ft)




AC167-CR


Name	Bendable surface profile
Material	Aluminum
Standard Length	1M (3.28ft)
Min. Bending Diameter	600mm(23.6in.)



AC167-EP



Name	Straight recessed profile
Material	Aluminum
Standard Length	1M (3.28ft)



AC167-LP


Name	Mud-in profile
Material	Aluminum
Standard Length	1M (3.28ft)




AC167-SCRL


Name	Bendable mud-in profile
Material	Aluminum
Standard Length	1M (3.28ft)
Min. Bending Diameter	600mm(23.6in.)



AC167-SGP


Name	Straight surface profile
Material	Aluminum with silicone groove
Standard Length	1M (3.28ft)



AC167-CSGP

Name	Bendable surface profile
Material	Aluminum with silicone groove
Standard Length	1M (3.28ft)
Min. Bending Diameter	600mm(23.6in.) only side bend




AC167-BA

Name	Light-block profile
Material	Aluminum
Standard Length	1M (3.28ft)

LEDLINE AXE 1617 DMX RGBW

3D Bending · Pixel RGBW








AC167-PC

Name	PC profile
Material	Polycarbonate
Standard Length	1M (3.28ft)










AC167-CPC

Name	Bendable PC profile
Material	Polycarbonate
Standard Length	1M (3.28ft)
Min. Bending Diameter	300mm(11.81in.)

Clip Options








AC167-MC

Name	Mounting clip
Material	Aluminum
Standard Length	25mm (0.98in.)

Bracket Options










AC167-SET-LA

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	20mm(0.79in.)

* AC167-SET-LA must be installed with AC167-AP











AC167-AMB

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	25.5mm (1 in.)

* AC167-AMB must be installed with AC167-AP










AC167-SET-LC

Name	Spring clip
Standard Pkg	1pcs

* AC167-SET-LC must be installed with AC167-EP

Tool Options



IF-167


Name	Fixture
Material	Resin
Standard Pkg	1pcs

* Insertion Fixture for AC167-CPC


LEDLINE AXE 1617 DMX RGBW

3D Bending · Pixel RGBW


Silicone End Caps (Optional, purchase for extra)



AC167-EC
Silicone closed end cap



AC167-EC5-F
Silicone end cap front entry with 30cm(0.98ft) cable, 2 pin



AC167-EC5-S
Silicone end cap side entry with 30cm(0.98ft) cable, 2 pin



AC167-EC5-B
Silicone end cap bottom entry with 30cm(0.98ft) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



AD007-5-MCW
Male connector,
30cm (0.98ft) UL white cable,
5 pin, IP67, Wet, 20 AWG



AD007-5-FCW
Female connector,
30cm (0.98ft) UL white cable,
5 pin, IP67, Wet, 20 AWG



AD007-5-MCB
Male connector,
30cm (0.98ft) black cable,
5 pin, IP67, Wet, 20 AWG



AD007-5-FCB
Female connector,
30cm (0.98ft) black cable,
5 pin, IP67, Wet, 20 AWG



AF001-1
1 Adjustable angle scissors set,
with 4 spare blades

LEDLINE AXE 1617 DMX RGBW

3D Bending · Pixel RGBW

Drivers


Non-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

DMX-Decoders & Controllers Options

Type	Code	Description	Environment	Size (L x W x H)
Controllers	K-1000C	2048 pixels, SD card playback, ideal for DIY, signage and small venues.	Indoor	159 * 89 * 24 mm
Controllers	T-790K	8-port output, dual-mode control, ideal for facades, stages and large projects.	Indoor	310 * 152 * 42 mm
Controllers	WT-DMX-M	WiFi & RF 3-in-1 DMX512 controller for RGB/RGBW/RGBCCT lighting	Indoor	120 * 43 * 27 mm

Wiring Diagram

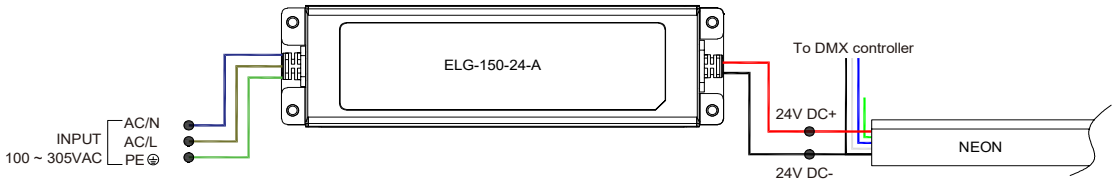

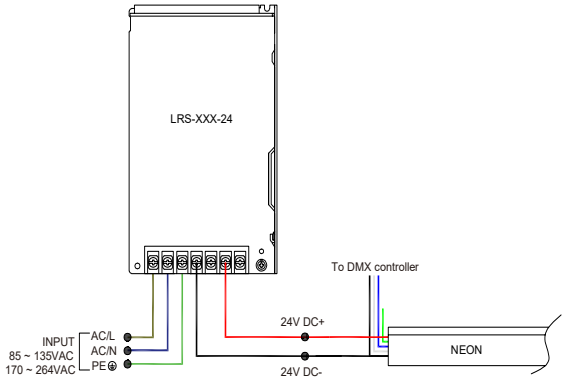

LEDLINE AXE 1617 DMX RGBW

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m