LEDLINE 3SIDE 1010T

Vertical Bending · Static White

Date | Fixture type


Project name | Project phase

Features


- 3-sides emitting design offers smooth diffusion at direct view
- IP68 rated, ideal for outdoor uses, not for underwater project
- 5 years warranty

Applications


Under cabinets, coves, shelves, closets, millwork, furnitures, etc.

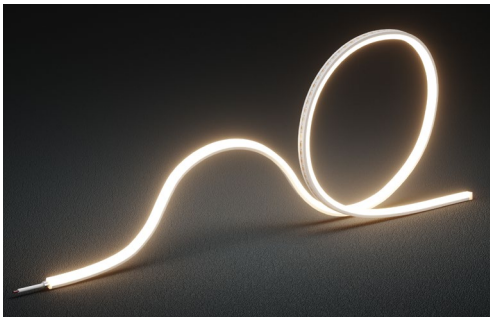


Bending Directions & Diameters



Dimensions



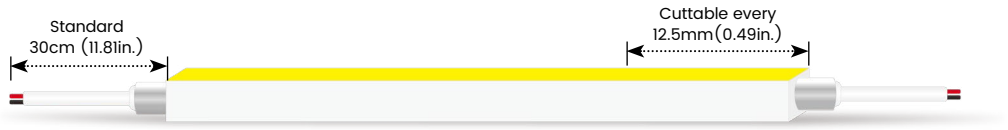

Order Code

Model	Bend Direction	Voltage	CCT	Power
3SIDE1010	**T**-Top bending	**24V**-DC24V	**927-RA90** 2700K **930-RA90** 3000K **940-RA90** 4000K	**100**-10W/M

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 30cm(0.98ft)
B	Bottom	**MC**	Male connector with 30cm(0.98ft) cable
S	Side	**FC**	Female connector with 30cm(0.98ft)cable
C	Closed	**NA**	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			
F	Front	**OW**	Open wire 30cm(0.98ft)
B	Bottom	**MC**	Male connector with 30cm(0.98ft) cable
S	Side	**FC**	Female connector with 30cm(0.98ft)cable
C	Closed	**NA**	Only for Closed Feed Entry

Length	
Max. nominal	5m (16.4ft)
Increment	12.5mm (0.49in.)

Mounting Order Code

Product Code
Please select on the Mounting Options page

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

LEDLINE 3SIDE 1010T

Vertical Bending · Static White

Lumen Output (lm/m)

CCT	10W/M
2700K	750
3000K	780
4000K	800
Max. Run Length	5m


Techinical Details

Efficacy	78lm/W @3000K 10W
CRI	Ra≥90
Beam Angle	160°(3-sides emitting)
LED MacAdam	3 steps
Average Life (L80B50)	>46,000 hours
Storage Temperature	-40°C~ 65°C
Operating Temperature	-40°C~ 65°C

Photometry

3SIDE1010T-24-930-100

LEDLINE 3SIDE 1010,Top bending,24V,RA90,3000K,10W/M

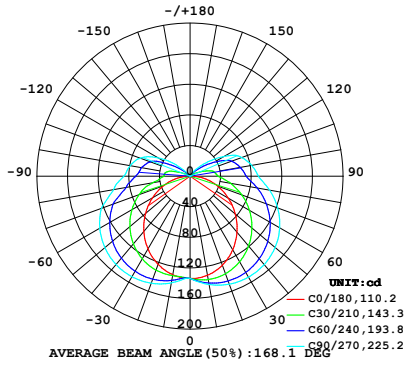

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	115.6	14.9%
0-40	198.1	25.4%
0-60	391.2	50.2%
0-90	631.7	81.1%
0-180	778.6	100.0%


LEDLINE 3SIDE 1010T

Vertical Bending · Static White


Feed Entry / End Cap Options


FT: Flush Translucent – IP68, factory-made only

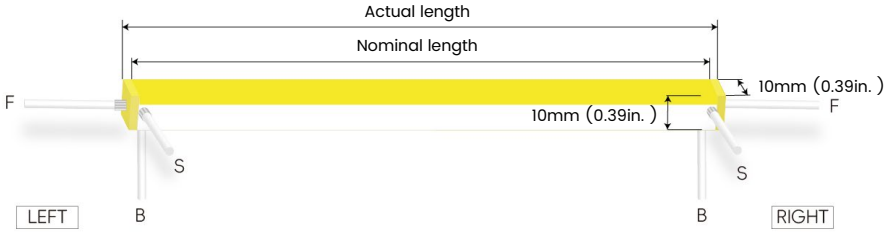



Silicone end cap – IP67, for field cuttable only

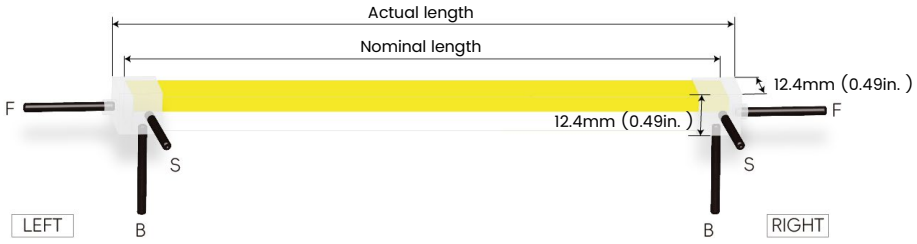





Connector Wire Options



OW: Open wire, **Dry only**
Standard 30cm(0.98ft),20 AWG,
wire length customizable




MC: Male connector, **Wet**
Standard 30cm(0.98ft), 20 AWG



FC: Female connector, **Wet**
Standard 30cm(0.98ft), 20 AWG


Mounting Options



AC023-APU


Name	Straight surface profile
Material	Aluminum
Standard Length	1M (3.28ft)



AC023-CR


Name	Bendable surface profile
Material	Stainless Steel
Standard Length	500mm (1.64ft)
Min. Bend Diameter	100mm(3.94in.)
*Not suitable for upside-down installtion	





AC023-PCU


Name	PC profile
Material	PC
Standard Length	1M (3.28ft)





AC023-CPCU



Name	Bendable PC profile
Material	PC
Standard Length	1M (3.28ft)
Min. Bend Diameter	100mm(3.94in.)



AC023-LP


Name	Mud-in profile
Material	Aluminum
Standard Length	1M (3.28ft)



AC023-ICP


Name	Inside corner profile
Material	Aluminum
Standard Length	1M (3.28ft)



AC023-OCP

Name	Outside corner profile
Material	Aluminum
Standard Length	1M (3.28ft)



AC023-SP


Name	Skirting board profile
Material	Aluminum
Standard Length	1M (3.28ft)

LEDLINE 3SIDE 1010T

Vertical Bending · Static White

Clip Options








AC025-MC

Name	Mounting clip
Material	Aluminum
Standard Length	25mm (0.98in.)








AC025-SET

Name	Mounting clip
Material	Stainless Steel
Standard Length	7mm(0.28in.)
*Not suitable for upside-down installtion	

Bracket Options










AC167-SET-LA

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	20mm(0.79in.)
* AC167-SET-LA must be installed with AC023-AP	










AC167-AMB

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	25.5mm (1 in.)
* AC167-AMB must be installed with AC023-AP	


LEDLINE 3SIDE 1010T

Vertical Bending · Static White


Silicone End Caps (Optional, purchase for extra)



AD025A
Silicone closed end cap



AD025-2-F
Silicone end cap front entry with 30cm(0.98ft) cable, 2 pin



AD025-2-S
Silicone end cap side entry with 30cm(0.98ft) cable, 2 pin



AD025-2-B
Silicone end cap bottom entry with 30cm(0.98ft) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



AD102-2-MCW
Male connector,
30cm (0.98ft)white cable,
2 pin, IP67, Wet, 20 AWG



AD102-2-FCW
Female connector,
30cm (0.98ft) white cable,
2 pin, IP67, Wet, 20 AWG



AD102-2-MCW
Male connector,
30cm (0.98ft) black cable,
2 pin, IP67, Wet, 20 AWG



AD102-2-FCW
Female connector,
30cm (0.98ft) black cable,
2 pin, IP67, Wet, 20 AWG



AF001-1
1 Adjustable angle scissors set,
with 4 spare blades

LEDLINE 3SIDE 1010T

Vertical Bending · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram


Non-dimmable

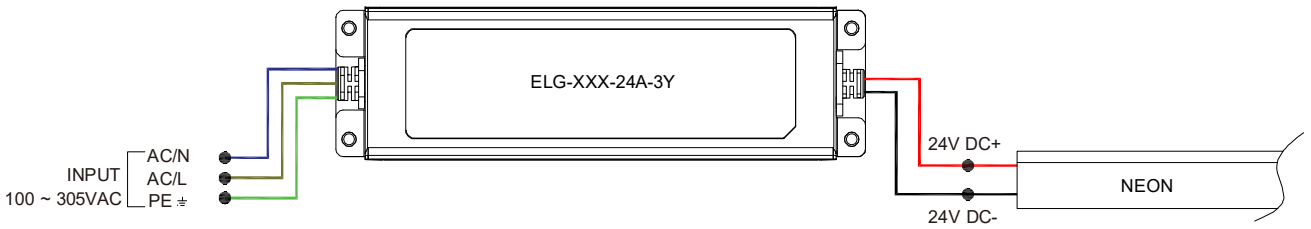

3 in 1-dimmable

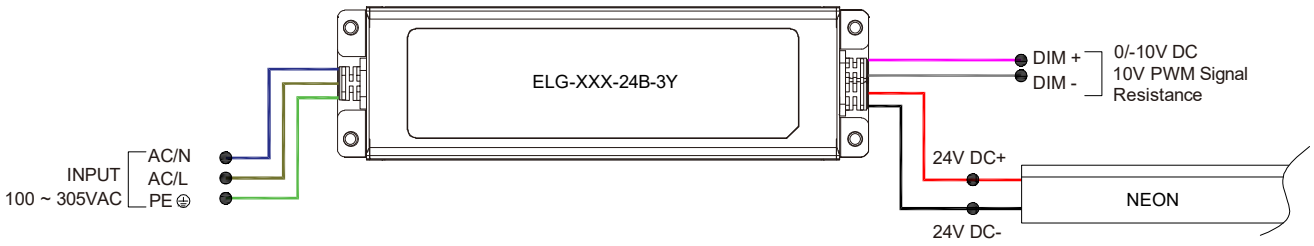

DALI-dimmable

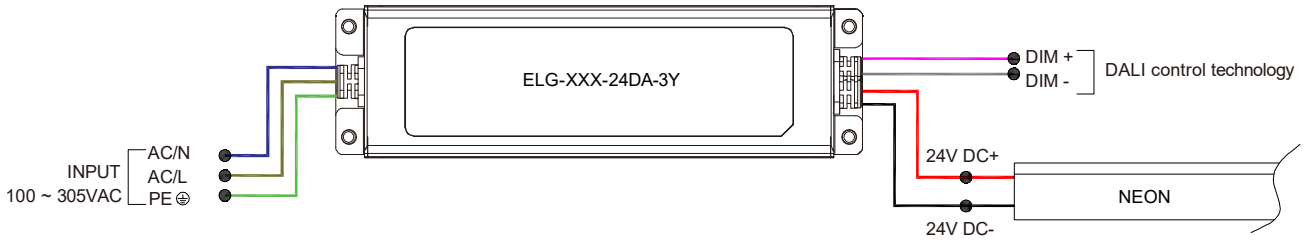

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m